

# Power Measurement

## AD-LU 70 FE



### Description

The digital power converter AD-LU 70 FE measures all values of the three-phase power grid such as current, voltage, energy, active, reactive, apparent power and frequency and makes this data available via a fieldbus. The device is therefore ideally suited for integration into energy management systems. The AD-LU 70 FE is powered by its measuring voltage L1. The current measurement takes place via the current transformer with passing-through hole attached to the back side. For the measurement of higher voltages or currents, external transformer must be used.

### Application

Measurement and monitoring of all electrical characteristics in electrical systems. Detection of load profiles for energy management systems, e.g. ISO 50001. Recording the energy consumption of individual consumers.

Attention: This is a Class A product according to EN 55011. Additional EMC actions may be necessary when used in small businesses or in residential areas.



### Specific characteristics

- Connection of 4-wire systems of any load
- Measurement of currents, voltages, power, power factors, frequency
- Low power loss during current measurement thanks to integrated through-current transformers
- Counters for applied and feedback energies
- Counters for inductive and capacitive reactive power
- Fieldbus interface for PROFINET or PROFIBUS

### Business data

#### Order number

AD-LU 70 FE	
AD-LU 70 FE-PN	PROFINET
AD-LU 70 FE-PB	PROFIBUS

### Information

#### Downloads

PROFINET / PROFIBUS Datei [AD-LU70FE-GSx.zip](#)  
Tender text [lu70fe.zip](#)

### Technical specifications

#### Current inputs

Measuring ranges	0 ... 1/5/20 A AC
Maximum wire diameter	4,8 mm <sup>2</sup>

#### Voltage inputs/supply

Nominal voltage	230 V AC
Rated frequency	50 Hz
Frequency range	40 ... 100 Hz
Measuring range	80 ... 253 V AC
Max. power consumption L1	4 VA
Input resistance L2, L3	970 kOhm

#### Optocoupler outputs

Maximum switching voltage	30 V DC
Maximum switching current	50 mA DC

#### PROFINET

Ethernet	2 Port Switch
Protocol specification	PROFINET IO
Default IP-address	0.0.0.0

#### PROFIBUS

Bus termination	120 ohms both sides at the end
Max. length of bus	500 m (no stubs)
Cable	twisted and shielded

#### Display

Type	TFT
Resolution	320x240 Pixel

#### Accuracy

Class	0,5
Temperature influence	100 ppm/K

#### Housing

Dimensions (WxHxD)	96x96x123 mm
Front panel cut out (bxh)	92x92 mm
Protection Front/Case	IP54/IP20
Connection method	Pluggable screw terminal
Terminals, wire cross section	2,5 mm <sup>2</sup> flex wire / 4 mm <sup>2</sup> one wire
Weight	250 g
Manner of fastening	panel-mounting

#### Environmental conditions

Ambient temperature	-10 ... 50 °C
Storage and transport	-10 ... 70 °C (no condensation)

#### EMC

Product family standard	EN 61326-1 <sup>1)</sup>
Emitted interference	EN 55011, CISPR11 Cl. A, Gr. 1

#### Electrical safety requirements

Product family standard	EN 61010-1
Overvoltage category	II
Pollution degree	2
Safety measurement	EN 61010-2-030
Measurement category	CAT III

#### Galvanic isolation, test voltages

Grid - PROFINET/PROFIBUS	4 kV, 50 Hz (1 min.)
Grid - Digital outputs	4 kV, 50 Hz (1 min.)

<sup>1)</sup> During checking, slight signal deviations are possible.



**ADAMCZEWSKI**  
Elektronische Messtechnik GmbH

Page 1/4

Printed 09.01.2024 We reserve the right for technical changes.

Felix-Wankel-Str. 13  
Tel. +49 (0)7046-875  
vertrieb@ad-messtechnik.de

74374 Zaberfeld  
Fax +49 (0)7046-7678  
www.adamczewski.com

# Power Measurement

AD-LU 70 FE



## Block and wiring diagram

## Dimensions

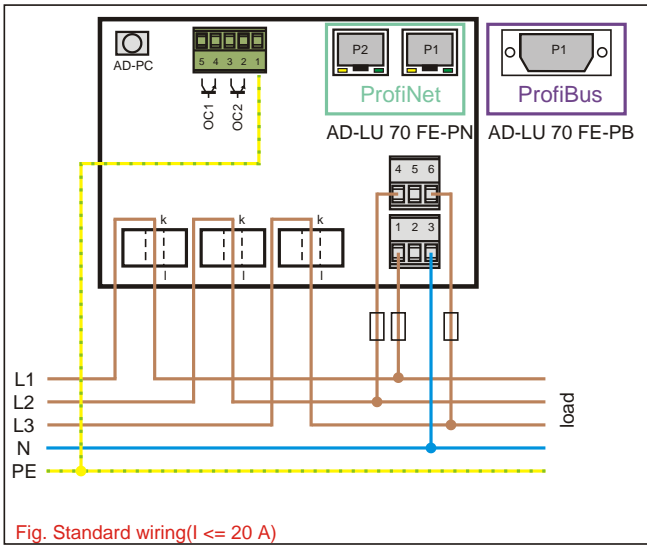


Fig. Standard wiring ( $I \leq 20$  A)

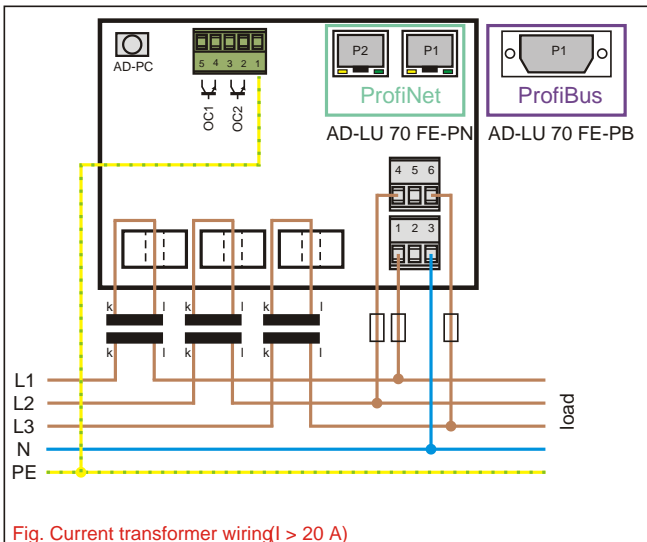
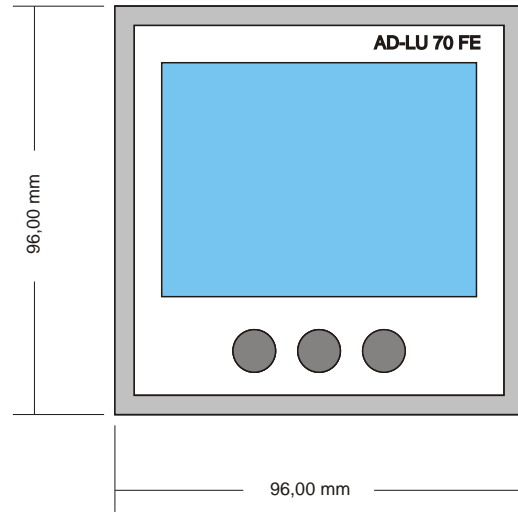


Fig. Current transformer wiring ( $I > 20$  A)


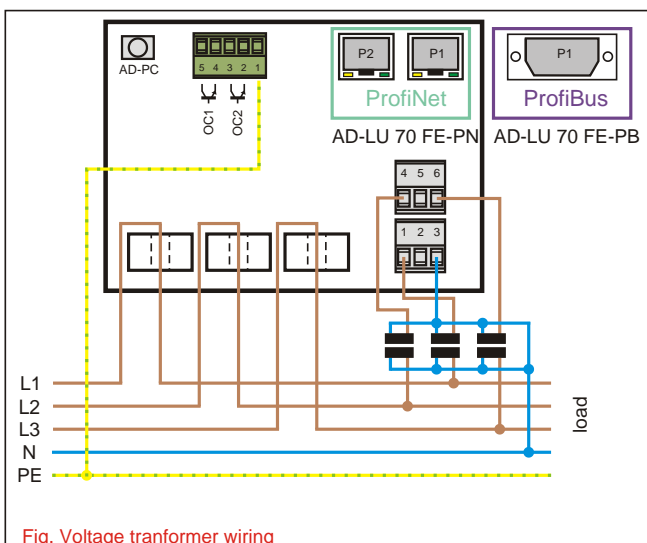


Fig. Voltage transformer wiring

# Power Measurement

AD-LU 70 FE

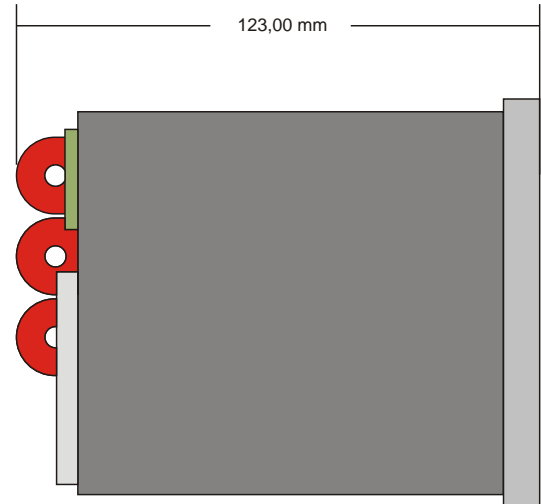

## Explanations:

### PROFINET: NS-Led (Network Status):

The NS-LED signals the network status.

LED Status:	Description:	Comments
off	Offline	- no Power - no connection with IO-Controller
green	Online RUN	- connection with IO-Controller established - IO-Controller in RUN Status
green - 1 flash	Online STOP	- connection with IO-Controller established - IO-Controller in STOP Status - IO-data bad - IRT synchronization not finished
grün - blinking	link mode	- Uses by engineering tools to identify the node on the network
red	fatal event	- Major internal error
rot - 1 flash	station name error	- Station name not set
rot - 2 flash	IP-Address error	- IP-address not set
rot - 3 flash	configuratio error	- Expected identification differs from real identification

### PROFINET: MS-Led (Modul Status):

The MS-LED signals the status of the ProfiNet module in the power meter.

LED Status:	Description:	Comments
off	not initialized	- Nor power or module in "SETUP" or "NW-INIT" state
green	normal operation	- Modul has shifted from "NW-INIT" state
green - 1 flash	diagnostic event	- diagnostic event present
red	exception error or fatal event	- Device in state EXCEPTION or major internal error
alternating red/green	firmwareupdate	- Do not power off the modul - turning the module off during this phase could cause permanent damage

### PROFIBUS: OP-Led (Operation Mode):

The OP-Led signals the operation mode.

rot - 2 flash	Configuration error	- See "Profibus Configuration Error" in Profibus specification
off	Offline / no power	
green	Online, data exchange	
green - flashing	Online, clear	
rot - 1 flash	Parameterization error	- See "Parameterization Data Handling" in Profibus specification
rot - 2 flash	Configuration error	- See "Profibus Configuration Error" in Profibus specification

### PROFIBUS: ST-Led (Status):

The ST-Led signals the status of the device.


LED Status:	Description:	Comments
off	Not initialized	- Not initialized jet
green	initialized	- Initialization completed successfully
green - flashing	initialized, diagnostic events present	Extended diagnostic bit is set
rot	Exception error	- Exception error detected

# Power Measurement

AD-LU 70 FE



## Circuit examples

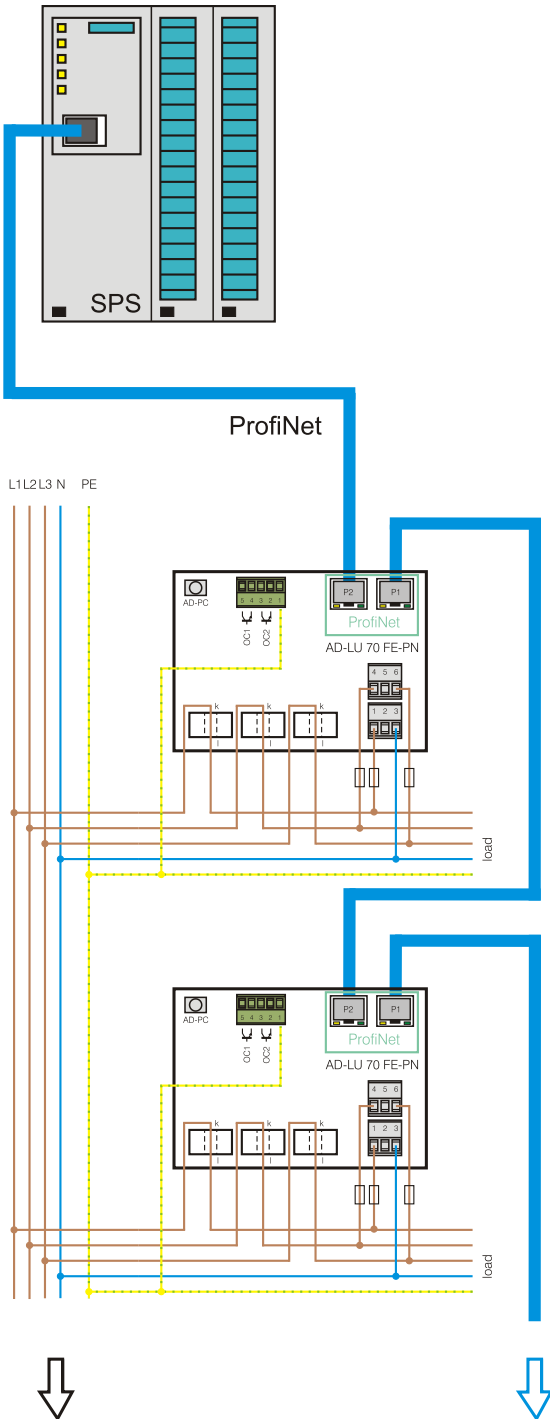

## ProfiNet/ProfiBus Data

P Total [kW]	float	4 Byte	Read	
P L1 [kW]	float	4 Byte	Read	
P L2 [kW]	float	4 Byte	Read	
P L3 [kW]	float	4 Byte	Read	
Q Total [kvar]	float	4 Byte	Read	
Q L1 [kvar]	float	4 Byte	Read	
Q L2 [kvar]	float	4 Byte	Read	
Q L3 [kvar]	float	4 Byte	Read	
S Total [kVA]	float	4 Byte	Read	
S L1 [kVA]	float	4 Byte	Read	
S L2 [kVA]	float	4 Byte	Read	
S L3 [kVA]	float	4 Byte	Read	
Power Factor Total	float	4 Byte	Read	
Power Factor L1	float	4 Byte	Read	
Power Factor L2	float	4 Byte	Read	
Power Factor L3	float	4 Byte	Read	
P Fundamental Total [kW]	float	4 Byte	Read	
P Fundamental L1 [kW]	float	4 Byte	Read	
P Fundamental L2 [kW]	float	4 Byte	Read	
P Fundamental L3 [kW]	float	4 Byte	Read	
P Harmonic Total [kW]	float	4 Byte	Read	
P Harmonic L1 [kW]	float	4 Byte	Read	
P Harmonic L2 [kW]	float	4 Byte	Read	
P Harmonic L3 [kW]	float	4 Byte	Read	
U L1 [V]	float	4 Byte	Read	
U L2 [V]	float	4 Byte	Read	
U L3 [V]	float	4 Byte	Read	
Calculated I N-LINE [A]	float	4 Byte	Read	
I L1 [A]	float	4 Byte	Read	
I L2 [A]	float	4 Byte	Read	
I L3 [A]	float	4 Byte	Read	
Peak U L1 [V]	float	4 Byte	Read	
Peak U L2 [V]	float	4 Byte	Read	
Peak U L3 [V]	float	4 Byte	Read	
Peak I L1 [A]	float	4 Byte	Read	
Peak I L2 [A]	float	4 Byte	Read	
Peak I L3 [A]	float	4 Byte	Read	
Frequency [Hz]	float	4 Byte	Read	
Angle I L1 [°]	float	4 Byte	Read	
Angle I L2 [°]	float	4 Byte	Read	
Angle I L3 [°]	float	4 Byte	Read	
Angle U L1 [°]	float	4 Byte	Read	
Angle U L2 [°]	float	4 Byte	Read	
Angle U L3 [°]	float	4 Byte	Read	
Counter total extract [kWh]	dword	4 Byte	Read	
Counter total feed [kWh]	dword	4 Byte	Read	
Counter total ind [kvarh]	dword	4 Byte	Read	
Counter total cap [kVarh]	dword	4 Byte	Read	
Counter total apparent power [kVAh]	dword	4 Byte	Read	
Counter working hours [h]	dword	4 Byte	Read	
Param I PRIM [A]	float	4 Byte	Read/Write	
Param I SEC [A]	float	4 Byte	Read/Write	
Param U PRIM [V]	float	4 Byte	Read/Write	
Param U SEC [V]	float	4 Byte	Read/Write	
Control Word	(*1)	word	2 Byte	Write
Status Word	(*2)	word	2 Byte	Read
Serial Number		dword	4 Byte	Read
Firmware Version		word	2 Byte	Read
Language		word	2 Byte	Read

Control Word	(*1)	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	Counter Reset	Softw. Reset
Status Word	(*2)	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
		—	—	—	—	—	—	—	—	—	High Temp.	I3 Overfl.	I2 Overfl.	I1 Overfl.	L2 Error	L1 Error	L1 Error