

DIN Rail connector

AD-GX Connector

Description

DIN rail supply connector (T-BUS manufactured by Phoenix)

Adamczewski item no.: AD-GX-Connector


Bearing rail connector to bridge the supply voltage of 2 devices (up to max. 10 devices)(*) of Adamczewski series GX (6.2 mm), to snap on a bearing rail DIN EN 50022

Connection technique:

Plug the bearing rail connectors together according to the number of required devices (1 connector for 2 devices) and snap them onto the top-hat rail.

Wire the first device of series "GX" with a supply voltage of 20-30 VDC and snap all devices onto the connectors. The supply voltage is automatically bridged for all following devices.

(*) When using a supply module, up to 25 devices per connector cord are possible (product Phoenix Mini MCR-SL-PTB).

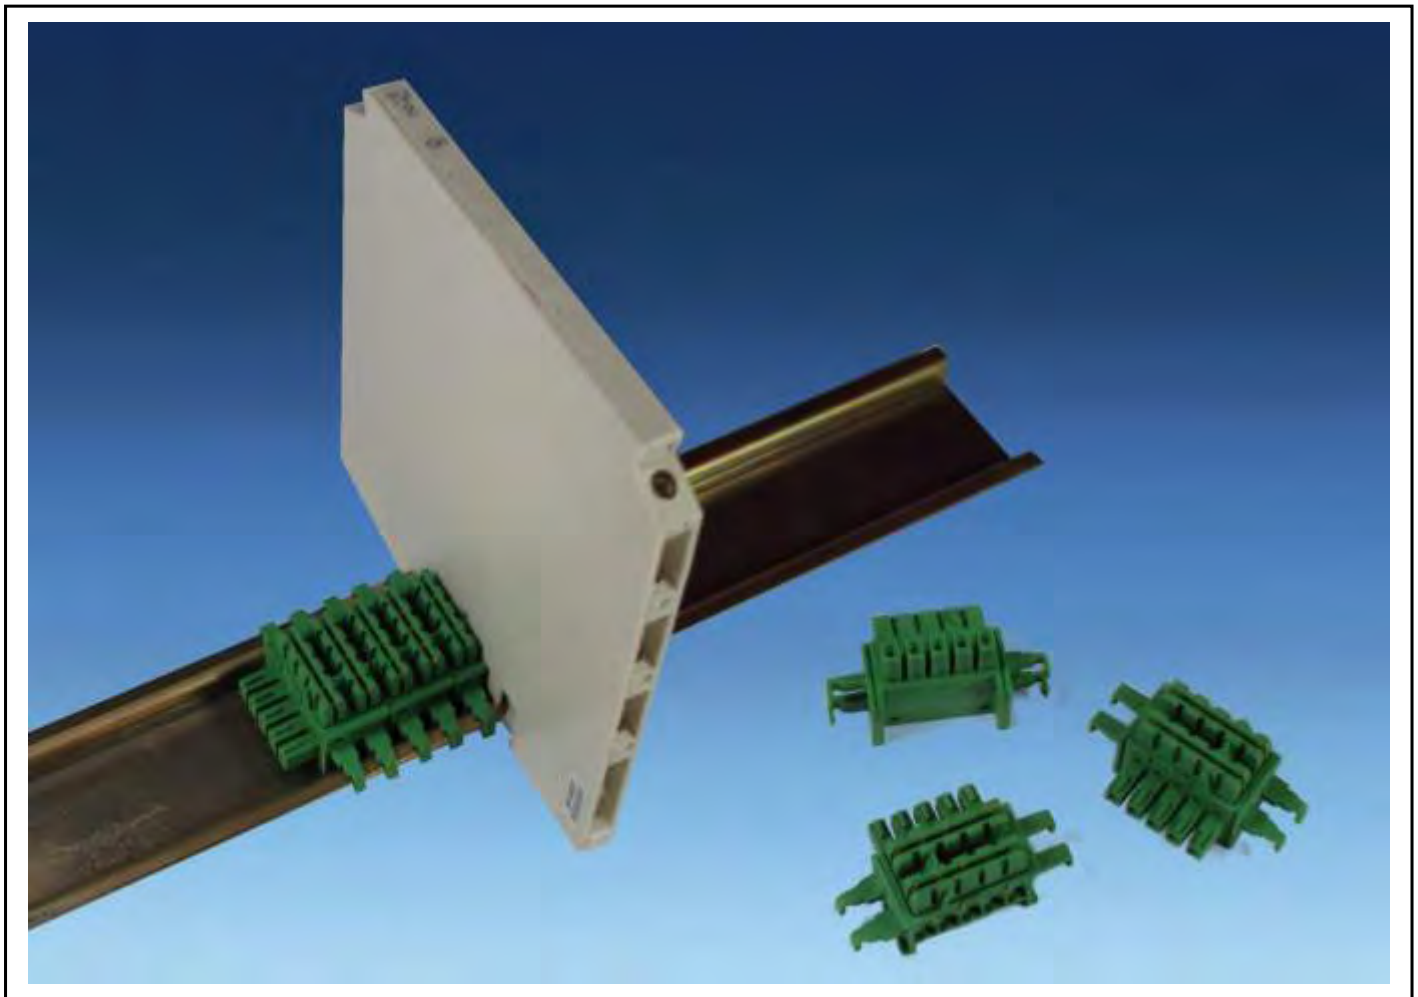

Printed 031/2008. We reserve the right for technical changes



ADAMCZEWSKI
Elektronische Messtechnik GmbH

Felix-Wankel-Str. 13
Tel. +49 (0)7046-875
vertrieb@ad-messtechnik.de

74374 Zaberfeld
Fax +49 (0)7046-7678
www.adamczewski.com