

# Indicator Light

AD-LM 8 FE-Vario

AD-LMB 8 FE-Vario

## Description

The signal/fault indicator AD-LM 8 FE-Vario, for mounting at the front of the control panel, informs with 8 multicolour leds about errors or operating conditions with glowing or blinking. Because of the multicolour leds, it's not necessary to change the leds for changing the colour. So it's very easy to change the technical appliance. The AD-LM 8 Vario can catch and save short pulses at the inputs, and for resetting its possible to connect external buttons. The device comes with 16 independent inputs which are easy to allot to one or more leds. Its possible to generate a colour- change by changing the input. A keypress on the touch key at the front of the device, generates a light test for all leds (all leds white). The AD-LM 8 Vario has a RS485 bus interface, which can be used for the configuration over the AD- Studio (PC). All messages can be labelled with the aid of inserted strips (i.e. paper, foil etc.). This signal/fault indicator is also available with no physical inputs as a bus version (AD-LMB 8 Vario). This can be controlled by the remote terminal block AD-AB 32 or by an external master.

## Application

Indicate signal/fault status of machines or plants.



## Specific characteristics

- detachable terminal clamps
- multicolour leds
- configuration by PC
- 16 independent inputs
- short-circuit proof feeding voltage
- external terminal-block for hat rail available

## Business data

Order number AD-LM 8 FE-Vario;AD-LMB 8 FE-Vario

## Technical specifications

### Active inputs

Voltage range	5 ... 30 V DC
Input resistance	> 45 kOhm

### Supply

Voltage range AC	50 ... 253 V AC, 50/60 Hz
Voltage range DC	22 ... 253 V DC
Nominal voltage AC / DC	230 V AC / 24 V
Power consumption AC / DC	3,0 VA / 1,3 W

### Feeding voltage for contacts

Voltage	4,8 ... 5,2 V DC
Strength	max. 1 mA

### Relay

Max. load AC	250 V / 2 A (cos phi = 1)
Max. load DC	50 V / 0,5 A (resistive load)
Cycles AC- load	ca. 100000 (cos phi = 1)
Cycles DC- load	ca. 100000 (resistive load)

### Housing

Dimensions (WxHxD)	96x96x71 mm
Front panel cut out	92x92 mm
Protection class panel	IP 54
Protection class connection	IP 20
Connection method	detachable terminal clamp
Terminals, wire cross section	1,0 mm <sup>2</sup> Strand with wire end ferrule / 1,5 mm <sup>2</sup> one wire
Manner of fastening	Panel-mount-case
Weight	305 g

### Environmental conditions

Ambient temperature	-10 ... 50 °C
Storage and transport	-10 ... 70 °C (no condensation)

### EMC

Product family standard	EN 61326-1
Emitted interference	EN 55011, CISPR11 Cl. B, Gr. 1

### Electrical safety requirements

Product family standard	EN 61010-1
-------------------------	------------

### RS485- Bus

Max. attendance	32
Max. length of bus	100 m
Bus termination	120 Ohm (both sites of the bus)
Wiring	bus topology



**ADAMCZEWSKI**  
Elektronische Messtechnik GmbH

Page 1/2

Printed 24.08.2022 We reserve the right for technical changes.

Felix-Wankel-Str. 13  
Tel. +49 (0)7046-875  
vertrieb@ad-messtechnik.de

74374 Zaberfeld  
Fax +49 (0)7046-7678  
www.adamczewski.com

# Indicator Light

AD-LM 8 FE-Vario


AD-LMB 8 FE-Vario

## Technical specifications

### Terminal assignment

Clamp	connection name
1	supply voltage
2	supply voltage
3	ground
4	ground
5	ground
6	RS485 A
7	RS485 B
8	contact supply
9	contact supply
10	input for light test
11	input 1
12	input 2
13	input 3
14	input 4
15	input 5
16	input 6
17	input 7
18	input 8
19	input 9
20	input 10
21	input 11
22	input 12
23	input 13
24	input 14
25	input 15
26	input 16
27	relay NO
28	relay COM
29	relay NC

## Block and wiring diagram

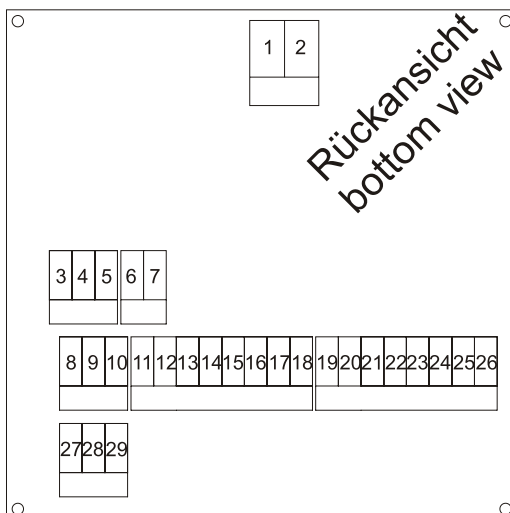

## Dimensions

