

**Description**

The vario-separation amplifier AD-TV 33 GL serves the galvanic separation and amplification of standard DC analogue signals. The standard signals 0-20 mA, 4-20 mA and 0-10 V are freely selectable at the front via switches at the input as well as at the output. All measuring ranges are permanent calibrated, however, they can still be adjusted via potentiometer at the front, which can be switched on. The selected output signal follows linear the input magnitude and is independent from the connected load up to a limiting value. Input, output and the supply voltage are galvanically separated from each other with a high insulation. An integral electronic wide range power pack with high efficiency prevents strong increases in temperature and allows high output loads. A high pack density is achieved in combination with the narrow type of construction. The universality saves storage costs, a diversity of types is therefore eliminated.

**Application**

For load amplification, galvanic decoupling and conversion of impressed standard signal measuring magnitudes.

**Specific characteristics**

- all standard signals at input and output are freely selectable
- switchable zero point trimmer and final value trimmer
- high output load
- 18 mm narrow housing
- wide range power supply

**Business data**

Order number AD-TV 33 GL

**Technical specifications****Input current**

Measuring range	0 ... 20 mA
Input resistance	50 Ohm

**Input voltage**

Measuring range	0 ... 10 V
Input resistance	200 kOhm

**Output current**

Output range	0 ... 20 mA
Max. burden	500 Ohm
Residual ripple	20 µAss

**Output voltage**

Output range	0 ... 10 V
Min. burden	500 Ohm
Residual ripple	10 mVss

**Supply**

Voltage range AC	50 ... 253 V AC, 50/60 Hz
Nominal voltage AC	230 V AC
Voltage range DC	20 ... 253 V DC
Nominal voltage DC	24 V DC
Power consumption AC / DC	2,8 VA / 1,5 W

**Transmission behaviour**

Basic accuracy	< 0,2 %
Temperature influence	100 ppm/K
Response time	~ 40 ms (10...90 % output signal)

**Housing**

Dimensions (WxHxD)	18x78x103 mm
Type of protection	IP 20
Connection method	screw clamp
Terminals, wire cross section	2,5 mm <sup>2</sup> flex wire / 4 mm <sup>2</sup> one wire
Bolting torque terminals	0,5 Nm
Weight	~ 140 g
Manner of fastening	35 mm DIN rail 35mm

**Environmental conditions**

Ambient temperature	0 ... 50 °C
Storage and transport	-10 ... 70 °C (no condensation)

**EMC**

Product family standard	EN 61326 <sup>1)</sup>
Emitted interference	EN 55011, CISPR11 Cl. B

**Electrical safety requirements**

Product family standard	EN 61010-1
Overvoltage category	II
Pollution degree	2

**Galvanic isolation, test voltages**


Input / output	2,5 kV, 50 Hz (1 min.)
Input / output	2,5 kV, 50 Hz (1 min.)
Signal / supply unit	4 kV, 50 Hz (1 min.)

**Protection circuits**


Input	electrical surge protection
Output	electrical surge protection
Power supply	electrical surge and reverse current protection

<sup>1)</sup> During checking, slight signal deviations are possible.


**Block and wiring diagram**

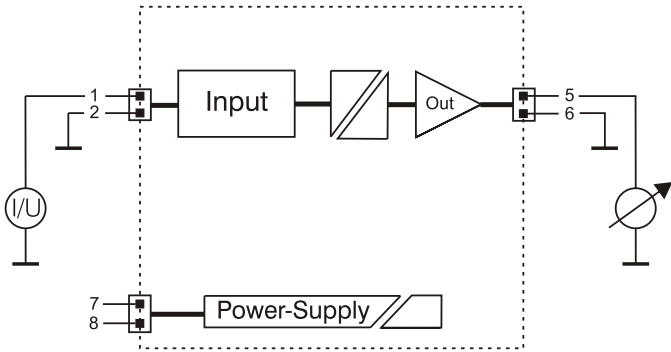

**Dimensions**

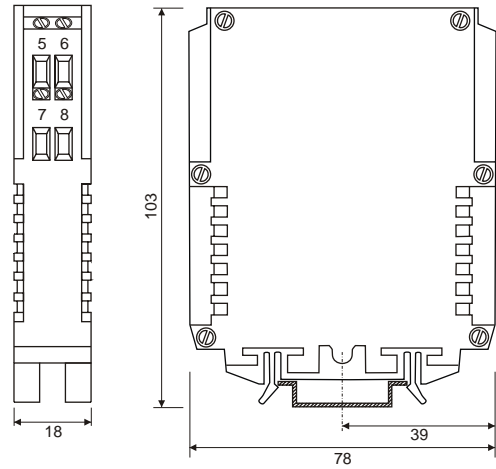

**Circuit examples**

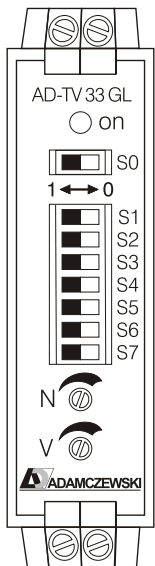

**Configuration**

Input	S0	S1	S2	S3	S4	S5	S6	S7	Output
0-20 mA	1	N	0	0	N	V	1	0	0-20 mA
0-20 mA	1	N	0	1	N	V	1	0	4-20 mA
0-20 mA	1	N	0	0	N	V	0	1	0-10 V
4-20 mA	1	N	1	0	N	V	1	0	0-20 mA
4-20 mA	1	N	0	0	N	V	1	0	4-20 mA
4-20 mA	1	N	1	0	N	V	0	1	0-10 V
0-10 V	0	N	0	0	N	V	1	0	0-20 mA
0-10 V	0	N	0	1	N	V	1	0	4-20 mA
0-10 V	0	N	0	0	N	V	0	1	0-10 V

**V = 0 = Span-trimmer active**      **N = 0 = Zero-trimmer of**  
**V = 1 = Span-trimmer off**        **N = 1 = Zero-trimmer active**

Switch Operation:

- S0: Input signal current or voltage
- S1: Activation zero-trimmer
- S2: Input signal 4...20 mA
- S3: Output signal 4...20 mA
- S4: Activation zero-trimmer
- S5: Activation span-trimmer
- S6: Output signal current
- S7: Output signal voltage

After activation of the trimmer the calibrated values can be adjusted. If activation is restored, the device has the default values.