

Isolation Converter


AD-TW 201 MO

Description

The separation converter serves the galvanic separation of impressed currents. It obtains its auxiliary energy from the input signal. The connection of an additional auxiliary voltage is not necessary. The output current is independent of the connected load up to the maximum value.

Application

Economic separation of computer inputs, protection of sensitive units against potential delay, galvanic decoupling in complex measuring units.

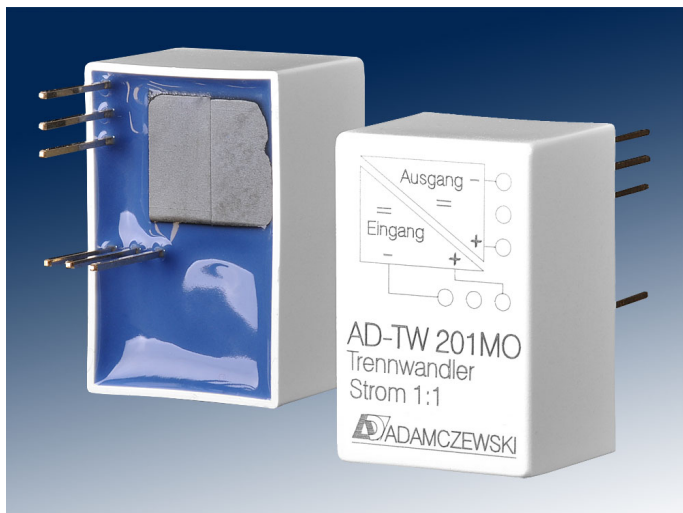

Business data

Order number AD-TW 201 MO

Technical specifications

Input current

Measuring range	0 ... 20 mA
Input voltage	< 25 V
Drop voltage	< 2,5 V
Oscillation current	< 80 µA

Output current

Output range	0 ... 20 mA
Max. burden	500 Ohm
Burden error	-0,03% / 100 Ohm
Residual ripple	0,5 % (500 Ohm; 20 mA)

Transmission behaviour

Basic accuracy	< 0,3 %
Input / output	1 : 1
Temperature influence	50 ppm/K
Response time	~ 20 ms
Transmission frequency	500 Hz (500 Ohm)

Housing

Dimensions (WxHxD)	20x30x16,5 mm
Type of protection	IP 20
Connection method	soldering pins
Weight	~ 25 g

Environmental conditions

Ambient temperature	0 ... 50 °C
Storage and transport	-10 ... 70 °C (no thawing)

EMC


Product family standard	EN 61326 ¹⁾
Emitted interference	EN 55011, CISPR11 Cl. B

Galvanic isolation


Base isolation, functional separation	
Working voltage	50 V DC
Test voltages input / output	500 V, 50 Hz (1 min.)

¹⁾ During checking, slight signal deviations are possible.

Block and wiring diagram

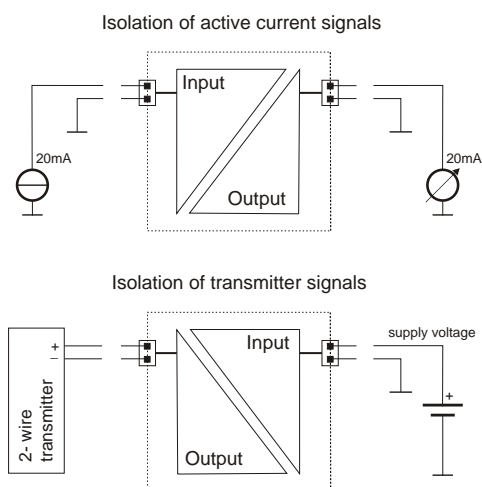

Dimensions

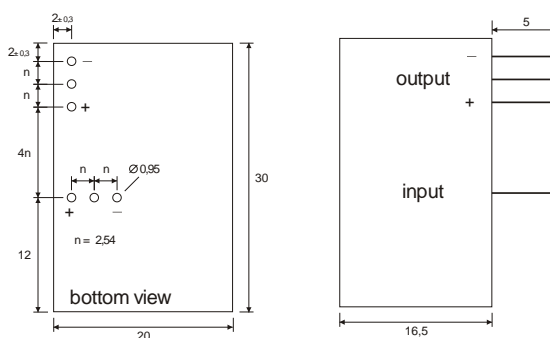

ADAMCZEWSKI
Elektronische Messtechnik GmbH