

Description

The supply-limit-switch AD-SMK 330 GS serves the switching of limiting values on transmitter signals. The device has an 0..20 mA, 4..20 mA input and an 0..10 V input and a current-limited transmitter feed. With this, 2-wire and 3-wire transmitter can be supplied and measured. With its two potential-free change-over contacts, the AD-SMK 330 GS can switch maximal two independent limiting values. The switching thresholds can be set at the front with the aid of the integral key coding switch in percent steps. The status of the relevant relay is indicated via an LED at the front. The AD-SMK 330 GS has two different operating modes, which can be selected via the function keys. Either two independent limiting values can be switched, whereby here one key coding switch per relay is effective. The switching hysteresis is in this case 1 percent. In operating mode hysteresis, both relays are synchronous. Here, the upper and lower switching point (switch-on point and switch-off point) can be selected separately with the two key coding switches. The relays can work in the operating current principle or the closed-circuit current principle in both operating modes. This can also be selected at the function keys. The efficient wide range power pack allows the supply with all established supply networks or voltage levels. Input, output and supply voltage are separated from each other galvanically with high isolation.

Application

Switching of limiting values on active standard signals, which correspond to, for instance, flows, height levels or temperatures.

**Specific characteristics**

- analog inputs for current and voltage
- current limited transmitter supply
- two potential-free changeover
- simple point setting using coded key
- wide range power supply

Business data

Order number AD-SMK 330 GS

Technical specifications**Current inputs**

Measuring range 0 ... 20 mA / 4 ... 20 mA
Input resistance 50 Ohm

Input voltage

Measuring range 0 ... 10 V
Input resistance 400 kOhm

Transmitter supply

Voltage open circuit/full load less than 21 V / higher 18 V
Current limit ca. 30 mA

Relay outputs A/B

Contact type potential free changeover
Max. AC-breaking capacity 250 V AC, 2 A AC, 50Hz
Max. DC-breaking capacity 50 V DC, 2 A DC
Switching operations
Mechanical 10^7
AC: 230V / 2A, $\cos(\phi)=1$ $6 * 10^5$
AC: 230V / 2A, $\cos(\phi)=0,4$ $2 * 10^5$
DC: 24V / 1A $2 * 10^5$

Transmission behaviour

Basic accuracy 1 % (1 Digit)
Temperature influence +/- 100 ppm/K of full scale
Response time 100 ms

Supply

Voltage range AC 50 ... 253 V AC, 50/60 Hz
Nominal voltage AC 230 V AC
Voltage range DC 20 ... 253 V DC
Nominal voltage DC 24 V DC
Power consumption AC / DC 2,4 VA / 1,8 W

Housing

Manner of fastening DIN rail 35mm (EN 50022)
Type of protection IP 20
Connector cross section max. 2,5 mm²
Weight ~ 200 g

Environmental conditions

Ambient temperature 0 ... 50 °C
Storage and transport -10 ... 60 °C (no thawing)

EMC

Product family standard ¹⁾ EN 61326
Emitted interference EN 55011, CISPR11 Cl. B
¹⁾During electromagnetic disturbance minor changes in output signal are possible.

Electrical safety requirements

Product family standard EN 61010-1
Overvoltage category II
Pollution degree 2

Galvanic isolation, test voltages



Input/relays 4 kV (1 min)
Input/power-supply 3 kV (1 min)
Relays/power supply 4 kV (1 min)
Relays with each other 3 kV (1 min)

Protective systems


Input over voltage
Power supply over voltage, over current and over temperature



Block and wiring diagram

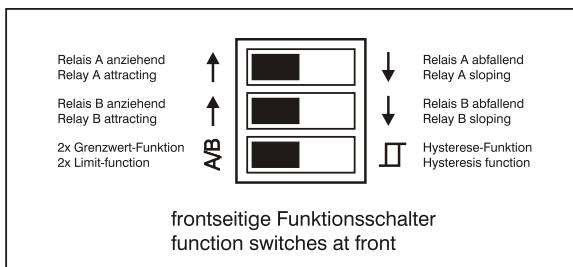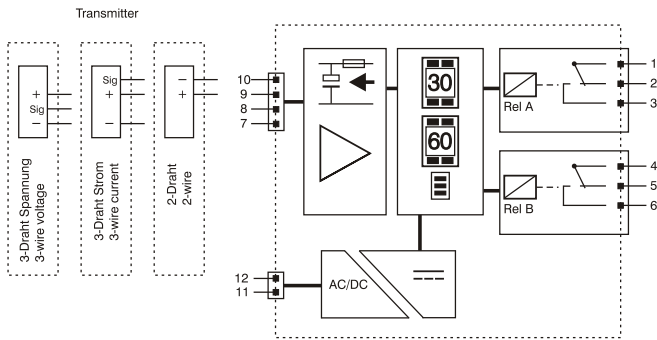

Dimensions

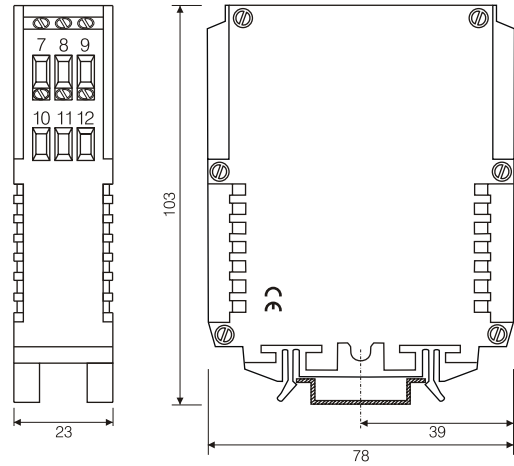

Circuit examples

