

Description

The universal supply isolating amplifier AD-STV 300 GS converts the two active standard industrial signals 0...20 mA and 4...20 mA, amplifies them and separates them galvanically. In addition, the device still has a current-limited supply voltage for the supply of two-wire transmitters. The signals are also available at the output. All combinations are possible. A switchover is not necessary. The signal combination from input to output is selected via the terminals.

Application

Amplification and adaptation of standard active signals and transmitter signals with easy conversion to a freely selectable output signal.



Specific characteristics

- Three signals freely selectable at the input and output
- current limited supply voltage of transmitters
- Galvanic isolation and amplification
- No mechanical switches necessary
- Input / output combination by clamping the desired signals
- No subsequent adjustment necessary
- Suppression of live zero signal (4mA)
- Price / performance ratio allows for warehousing

Business data

Order number AD-STV 300 GS

Technical specifications

Current inputs

Measuring range 1	0 ... 20 mA
Measuring range 2	4 ... 20 mA
Input resistance 1/2	50 Ohm

Transmitter supply

Open-circuit voltage	20 V
Voltage at 20 mA	14 V
Current limit	ca. 30 mA

Current outputs

Output range 1	0 ... 20 mA
Output range 2	4 ... 20 mA
Maximum burden 1/2	500 Ohm
Simultaneous use	Nein

Output voltage

Output range	0 ... 10 V
Min. burden	1000 Ohm

Supply

Voltage range	50 ... 253 V AC (50 Hz), 20 ... 253 V DC
Nominal voltage	230 V AC (50 Hz), 24 V DC
Power consumption	4 VA, 2 W

Transmission behaviour

Basic accuracy	< 0,2 %
Temperature influence	100 ppm/K
Response time	~ 50 ms (10...90 % output signal)

Housing

Dimensions (WxHxD)	18x78x103 mm
Type of protection	IP 20
Connection method	screw clamp
Terminals, wire cross section	2,5 mm ² flex wire / 4 mm ² one wire
Bolting torque terminals	0,5 Nm
Weight	~ 140 g
Manner of fastening	35 mm DIN rail 35mm

Environmental conditions

Ambient temperature	-10 ... 50 °C
Storage and transport	-10 ... 70 °C (no condensation)

EMC

Product family standard	EN 61326-1 ¹⁾
Emitted interference	EN 55011, CISPR11 Cl. B

Electrical safety requirements

Product family standard	EN 61010-1
Overvoltage category	II
Pollution degree	2

Galvanic isolation, test voltages


Input to output	3,75 kV, 50 Hz (1 min.)
Input, output to supply	3 kV, 50 Hz (1 min.)

¹⁾ During checking, slight signal deviations are possible.


Supply Isolation Amplifier

AD-STV 300 GS

Block and wiring diagram

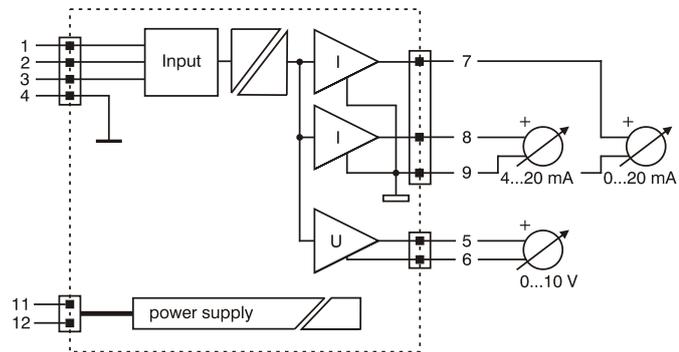

input wiring

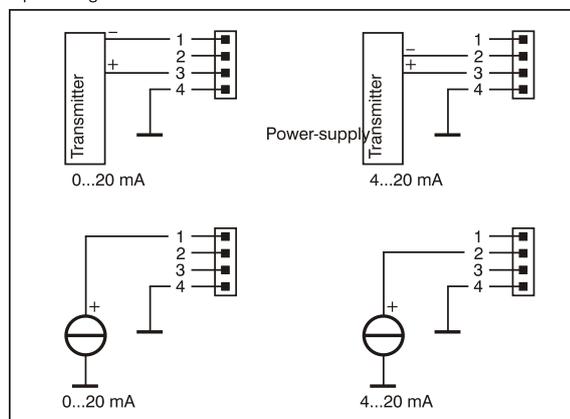

Dimensions

