

Description

The isolation transmitter AD-TWT 24 GM in 2-wire-transmitter technique impress into a supply voltage a standard measurement signal of 4-20 mA. The output signal follows linear the input signal up to a maximum value. The connection of an additional auxiliary voltage is not necessary. It obtains its auxiliary energy from the transmitter supply.

Application

Economical galvanical isolation of a active analog signal in a impressed passive 4-20mA signal (2-wire-transmitter technique).



Specific characteristics

- 2-wire-transmitter technique, low amount of cabling
- output signal of 4-20 mA independent from supply voltage
- compact design (DIN rail)

Business data

Order number
AD-TWT 24 GM

Information

Downloads

Safety instructions [ad-safety-instructions.pdf](#)

Technical specifications

Input current

Measuring range	4 ... 20 mA
Required input voltage	2,7 V (4 V no load)

Transmitter output

Output range	4 ... 20 mA
Feeding voltage	8 - 30 V DC
Residual ripple	max. 0,5 % of full scale

Transmission behaviour

Basic accuracy	< 0,2 % of full scale
Temperature influence	150 ppm/K of full scale
Response time	~ 700 ms

Housing

Dimensions (WxHxD)	13x78x103 mm
Type of protection	IP 20
Connection method	screw clamp
Terminals, wire cross section	2,5 m ² flex wire / 4 mm ² one wire
Bolting torque terminals	0,5 Nm
Weight	~ 100 g
Manner of fastening	35 mm DIN rail 35mm

Environmental conditions

Ambient temperature	-10 ... 50 °C
Storage and transport	-10 ... 70 °C (no condensation)

EMC

Product family standard	EN 61326-1 ¹⁾
Emitted interference	EN 55011, CISPR11 Cl. B, Gr. 1

Electrical safety requirements

Product family standard	EN 61010-1
Overvoltage category	II
Pollution degree	2
Maximum permanent working voltage across the galvanic isolation	45 V DC

Galvanic isolation, test voltages

Input / output	510 V, 50 Hz (1 min.)
----------------	-----------------------

Protection circuits


Input	electrical surge and reverse current protection
Output	electrical surge protection

¹⁾ During checking, slight signal deviations are possible.

Isolation Transmitter

AD-TWT 24 GM

Block and wiring diagram

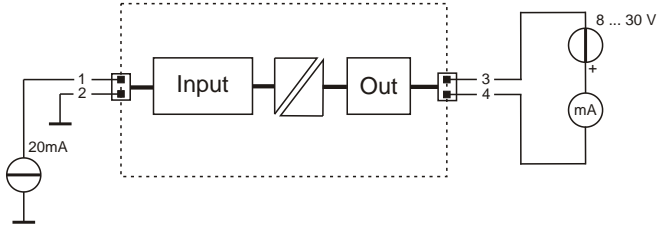

Dimensions

