

VarioShow[®] 4-channel Indicator with galvanically isolated current inputs

AD-VS8A4-G

Description

The VarioShow AD-VS8A4-G serves the visualisation of 4 independently parameterized analogue signals, which can be initialized independently.

Each display channel has a current input and a voltage input and can be sized completely freely. The current inputs are galvanically isolated.

There are the most diverse types of indication, amongst others a drag pointer function (display of the highest and lowest values) and a linearization over 24 x/y points (to show volume above the height, for instance). The physical dimension can be selected from a table. The measuring value is illustrated as a number or with a quasi-analogue bar. All parameter can also be operated or saved via a PC.



An integral electronic wide range power pack with a high degree of effectiveness allows operation in a supply range of 20-253 VDC or 50-253 VAC.





Application

Display of up to 4 independent analogue input signals in freely scalable dimension and unit. And with integrated galvanically isolated current inputs.

Specifications

construction type	panel-mount case 48x96 mm front to control panel: IP 65 / rear: IP 20
power supply	wide-range 20-253 VAC / 50-253 VDC
power consumption	approx. 4 VA resp. 2 W
input	4-channel current (max. 20 mA / galvanically isolated) or voltage (max. 10V / with common ground)
resolution	10 bit
input impedance	current: 230 Ohm; voltage: 100 kOhm
channel separation for current inputs	200V AC/DC
features	- independent indication of each channel - free physical scaling - linearization over 24 x/y points - follow-up pointer function - number or quasi-analogue indicator - individual channel notation
interface	AD-UART
insulation test voltage	signal/power-supply: 4 kV RMS
protective system	input/power supply: against over voltage, over current, over heating
CE-conformity	EN 61326
ambient temperature	0 to 50°C

Connections and dimensions: AD-VS8A4-G

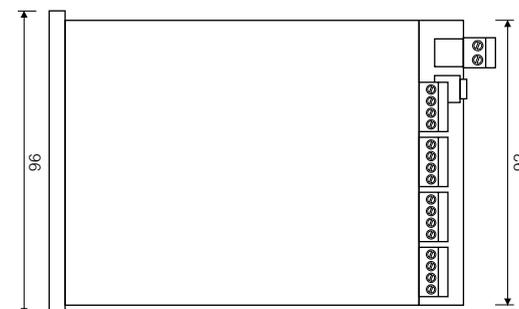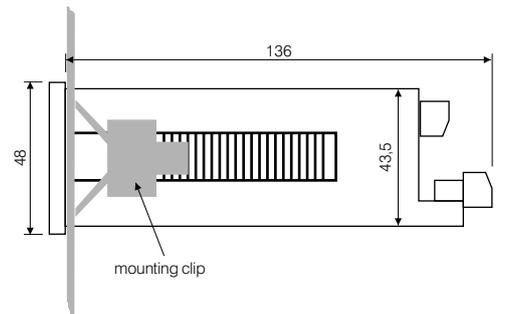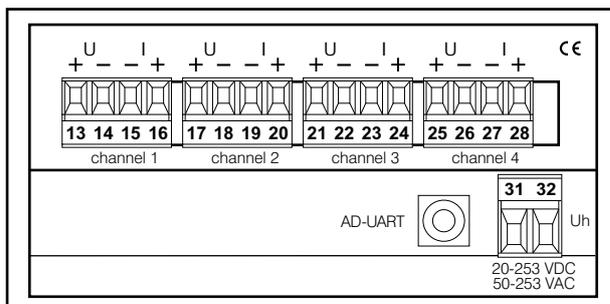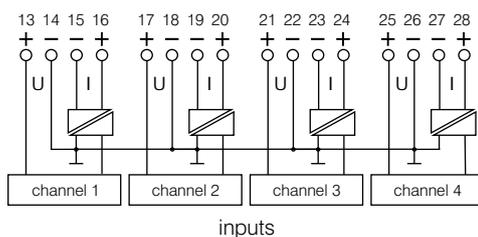

Printed 13.02.2013. We reserve the right for technical changes



ADAMCZEWSKI
Elektronische Messtechnik GmbH

Felix-Wankel-Str. 13
Tel. +49 (0)7046-875
vertrieb@ad-messtechnik.de

74374 Zaberfeld
Fax +49 (0)7046-7678
www.adamczewski.com