

Description

The digital temperature measuring converter of series VarioCheck VC5B are freely programmable digital measuring transformer with two analogue outputs and up to 4 limiting value relays. The input of all characteristics is carried out via the configuration software AD-Studio. VarioCheck fulfils all tasks of a universal measuring value recording through integral function modules such as selectable relay functions, simulation modus, free linearizing curves and a wide range of supply voltage.



Specific characteristics

- Resistance thermometer inputs, types Pt/Ni 100, Pt/Ni 500, Pt/Ni 1000
- Thermocouples inputs, types J, T, K, E, N, S, R, B, C or inputs a mV/T-characteristic curve. Selectable internal or external reference junction
- A bipolar mV-Voltage input. Free linearizing curves possible.
- Current- and voltage input different scaleable and simultaneously useful. Must not connect the clamps 8 and 9.
- Galvanic 3-circuit separation of input, output and supply.
- Freely definable scaling of the quantity to be measured through stating range, decimal point position and unit from the list or defined unit.
- Zoom function, expanded scale, linearizing, inverse modus.
- Monitoring of the measuring signal with up to 4 freely adjustable limiting values.
- Monitoring functions such as limiting values, window function or signal trend each with relay.
- Non-volatile saving of all set parameters.

Business data

Order number

AD-VC5B GVC-R0	without relay
AD-VC5B GVF-R2	two relays
AD-VC5B GVF-R4	four relays

Technical specifications

Resistance thermometer inputs Pt100, Pt500, Pt1000 to DIN EN 60751

Measuring range	-200 ... +850 °C
Connection method	2-, 3- oder 4-wire system
Resolution	16 Bit
Accuracy	0,5 K
Smallest measuring spans	20 K
Max line resistance ¹⁾	10 Ohm/cable
Sensor supply	
Pt100	1 mA
Pt500, Pt1000	210 µA

¹⁾ With 2-conductor the line resistance comes as an offset into the measurement.

Resistance thermometer inputs Ni100, Ni500, Ni1000 to DIN EN 43760

Measuring range	-60 ... +230 °C
Connection method	2-, 3- oder 4-wire system
Resolution	16 Bit
Accuracy	0,5 K
Smallest measuring spans	20 K
Max line resistance ¹⁾	10 Ohm/cable
Sensor supply	
Ni100	1 mA
Ni500, Ni1000	210 µA

¹⁾ With 2-conductor the line resistance comes as an offset into the measurement.

Thermocouples

Comparative place:

Internal	measurement with LM35 in the device connecting terminals
External	Cold junction temperature selectable by parameters
Resolution	16 Bit
Accuracy	0,2 % of measuring range
To DIN EN 60584:	
Measuring range type J	-200 ... +1200 °C
Measuring range type T	-200 ... +400 °C
Measuring range type K	-200 ... +1360 °C
Measuring range type E	-200 ... +1000 °C
Measuring range type N	-200 ... +1300 °C
Measuring range type S	-40 ... +1760 °C
Measuring range type R	-40 ... +1760 °C
Measuring range type B	+400 ... +1800 °C
After standard ASTM E988:	
Measuring range type C	0 ... +2320 °C
Smallest measuring spans	100 K

Voltage inputs

Measuring range	-18 ... +18 mV
	-36 ... +36 mV
	-72 ... +72 mV
	-144 ... +144 mV



Multifunction Transducer Temperature Measuring Converter

AD-VC 5B

Technical specifications

Current output 20 mA

Output range	0 ... 20,4 mA
Resolution	10 Bit
Accuracy	20 µA
Max. burden	500 Ohm
Residual ripple	20 µAss

Voltage output 10 V

Output range	0 ... 10,2 V
Resolution	10 Bit
Accuracy	10 mV
Min. burden	5 kOhm
Residual ripple	10 mVss

If current output and voltage output are used at the same time, both circles may not be connected.

Relay outputs A..D

Max switching voltage	AC 250 V AC
Max switching current AC	2 A AC
Max switching voltage	DC 50 V DC
Max switching current DC	2 A DC

Transmission behaviour

Sampling rate	1 measure/s
Linearity error	0,2 % of full scale
Temperature influence	+/-100 ppm/K of full scale

Supply

Supply voltage	50 ... 253 V AC
	20 .. 253 V DC
Max power consumption at 24V DC	2,6 W
Max power consumption at 230V AC	5 VA

Housing

Dimension	BxHxT 33x110x134 mm
Manner of fastening	DIN rail mounting 35mm, EN 50022
Type of protection	IP 20
Connection method	detachable terminal clamp, 5 mm grid
Wire cross section	max. 2,5 mm ²
Weight	ca. 200 g

Environmental conditions

Permissible ambient temperature	-10 ... +60 °C
Storage and transport	-10 ... 70 °C (no condensation)

EMC


Product family standard	EN 61326
Discharge static electricity, ESD	IEC 61000-4-2
Electromagnetic fields ¹	IEC 61000-4-3
Fast transients, burst	IEC 61000-4-4
Impulse voltage, surge	IEC 61000-4-5
Route controlled HF-signals	IEC 61000-4-6
Emitted interference	EN 55011, CISPR11 Cl. B

¹During electromagnetic disturbance minor changes in output signal are possible.


Galvanic isolation, test voltages

Input to output	2,5 kV, 1min
Input/output to auxiliary voltages	4 kV, 1min
Outputs together	no galvanic isolation
Input to the programming interface	no galvanic isolation

Block and wiring diagram

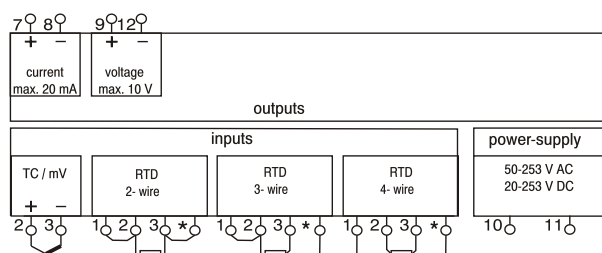

AD-VC 5B GVC

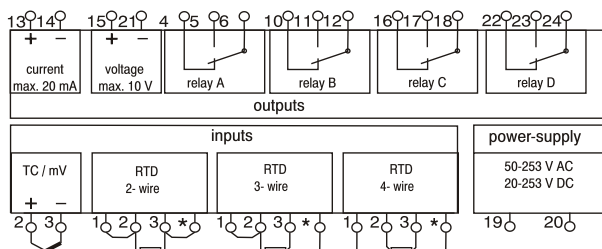

AD-VC 5B GVF

Dimensions

